


Simulation of surface wall interactions in nuclear fusion plasma



Name	NISHIMURA Kenji	E-mail	nisimura@numazu-ct.ac.jp
Job Title	Professor	Degree	Doctor of Engineering
Academic Society and Association	The Japan Society of Plasma Science and Nuclear Fusion Research The Institute of Electrical Engineers of Japan		
Research Keywords	Nuclear Fusion, Plasma, Simulation		
Technical Fields and Topics possible for collaboration	<ul style="list-style-type: none">▪ Analysis of the transportation process of the hydrogen isotope fuel in gas and the solid▪ Simulation of surface wall interactions in nuclear fusion plasma		

Details of the Research Theme

About a nuclear fusion study, simulation programming to develop a nuclear fusion reactor is carried out to contribute to the solution to energy problem. The nuclear fusion generation is relatively safe and is a clean generation system. As the fusion reaction was the same as a phenomenon to be taking place in the sun, the artificial sun would be made if this was realized. Materials evaluation to make such a device, the evaluation of the materials which are appropriate by the development of the simulation program to analyze in pursuit of various processes and the program are performed.

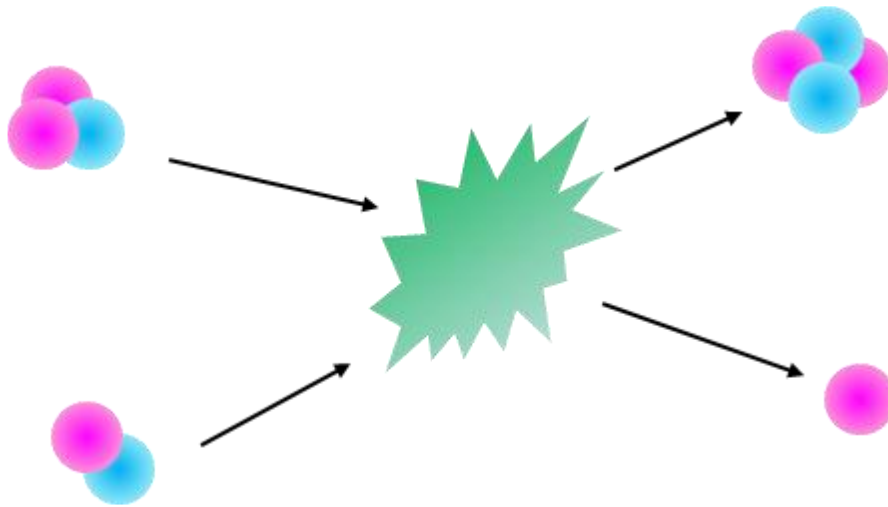

Model of the fusion reaction by Deuterium and Tritium

Control of Self-Assembling Nanostructure and Nano-Templating Applications




Name	KOMURA Motonori	E-mail	m-komura@numazu-ct.ac.jp
Job Title	Associate Professor	Degree	Doctor of Engineering
Academic Society and Association	The Society of Polymer Science, Japan, The Japan Society of Applied Physics, The Chemical Society of Japan		
Research Keywords	Polymer, Liquid Crystal, Self-Assembly, Scanning Probe Microscopy		
Technical Fields and Topics possible for collaboration	<ul style="list-style-type: none"> Evaluation of nanostructure and nano-physical properties by SPM Nanostructure analysis of thin film by grazing incidence X-ray scattering Control of self-assembling structure of soft materials Measurements of mechanical, thermal and optical properties 		

Details of the Research Theme

Fabrication of nanostructure by bottom-up method via molecular self-assembly. Expected applications: ultra-high density storage media, nanofilter, low dielectric constant material, wide interface solar cell, high sensitivity sensor, ion conductive membrane, etc.

Controlling the self-assembly behavior of a block copolymer (BC) allows for tailoring of the material's structure and properties for specific applications. Of particular interest are block copolymers that form cylindrical nanodomains that are perpendicularly oriented to a substrate surface and span the full width of the film, which is crucial for mass transport through the cylindrical channels in a membranous film. In comparison to the techniques for synthesizing conventional amorphous-amorphous block copolymers, the introduction of a crystalline or liquid crystalline polymer to a block copolymer molecule is an excellent synthesis approach for fabricating hierarchical structures. These hierarchical structures include microphase-separated nanostructures and crystalline or liquid crystalline structures. We focus on the side-chain liquid crystalline BC.

We have developed amphiphilic PEO-*b*-PMA(Az) thin films that have anomalous, orientation-defined, microphase-separated nanostructures, i.e., hexagonally arranged PEO cylindrical domains surrounded by PMA(Az) domains that are perpendicular to the surfaces of various types of substrates due to air-surface induced formation of microphase-separated nanostructures. Another important characteristic for applications process is that the cylindrical domains are not physical pores; instead, they are filled with undercooled PEO at room temperature. The PEO-containing block copolymers work directly as a soft template. We have utilized the PEO-*b*-PMA(Az) template to fabricate nanoscale functional materials using the PEO cylindrical domains as ethereal, permeable channels. Both ends of the cylinder domains are open as air and substrate interfaces. The following figure summarizes the templating processes in four categories: domain-selective doping, etching mask with molecule-transport channels, domain-selective growth on conductive substrates, and molecule-transportation membrane.

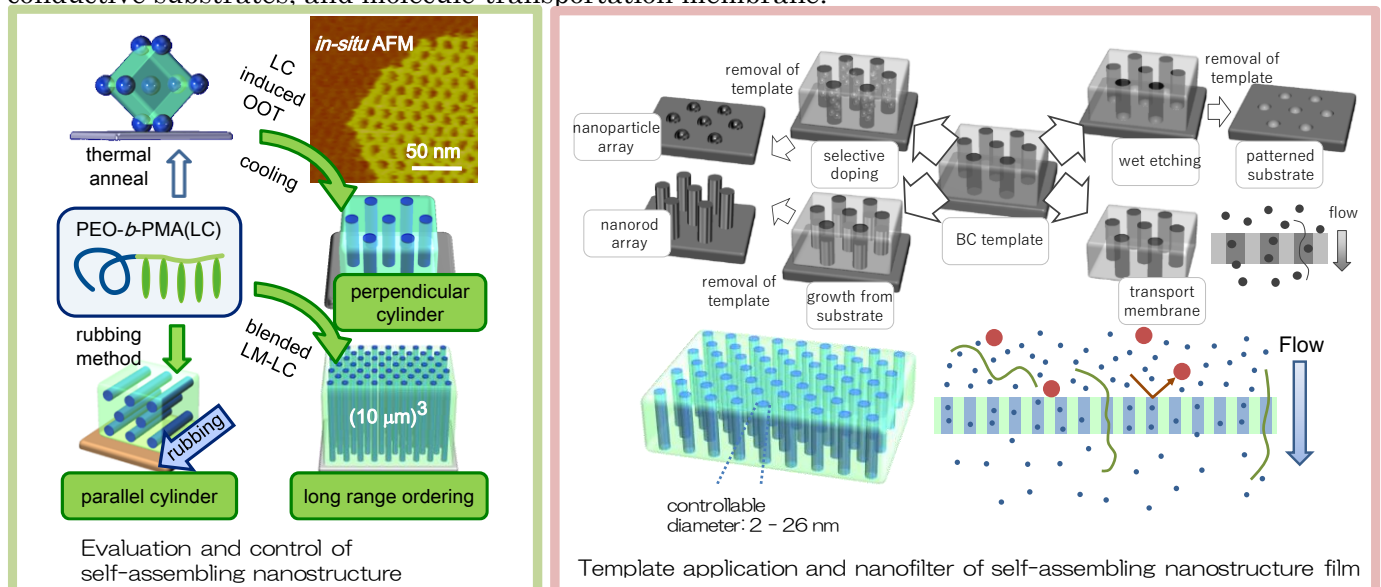

High Fidelity Color Reproduction




Name	TAKAYA Masanori	E-mail	takaya@numazu-ct.ac.jp
Job Title	Associate professor	Degree	Ph.D.
Academic Society and Association	Society for Information Display		
Research Keywords	Color reproduction, Imaging, Information display		
Technical Fields and Topics possible for collaboration	<ul style="list-style-type: none"> Color universal design. Color matching between LCD and color printers. Display calibration. Display profile analyzing. 		


Details of the Research Theme

We provide a technical solution about color reproduction or color matching.

Imaging devices are designed for achieving preferred color reproduction instead of accurate color reproduction. Color reproduction errors cause critical troubles in some situations such as online shoppings or telemedicine. Some color conversion methods for hi-fi color reproduction were proposed in our laboratory. In order to evaluate our methods, we have a technique of measuring colors and calibrating devices. In addition, we try to evaluate color perception which caused by diversity of human vision. A multi-spectral camera and a multi-primary display are adopted to evaluate it.

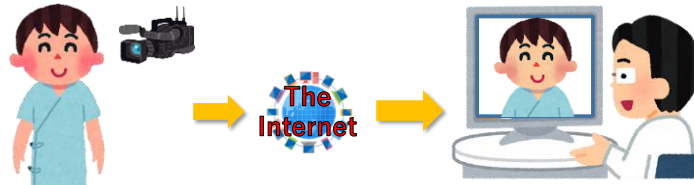

High fidelity color reproductions are important in tele-medicine.

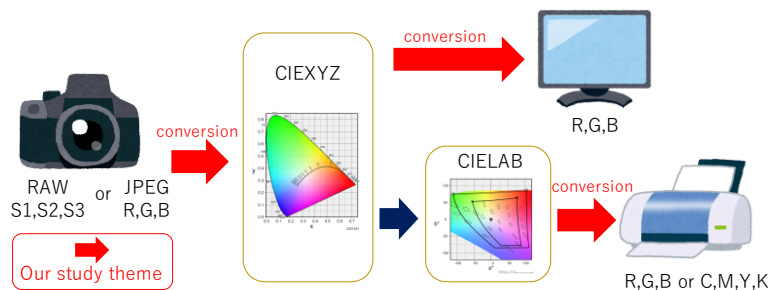

Analysis of magnetic materials by micromagnetics simulation



Name	Ohsawa Tomokatsu	E-mail	t-ohsawa@numazu-ct.ac.jp
Job Title	Associate professor	Degree	Doctor of Engineering
Academic Society and Association	The Physical Society of Japan, The Magnetics Society of Japan		
Research Keywords	magnetic memory, micromagnetics simulation, spintronics		
Technical Fields and Topics possible for collaboration	<ul style="list-style-type: none"> Analysis of magnetic materials by micromagnetics simulation Theoretical considerations on magnetism and conduction 		

Details of the Research Theme

We aim to develop next-generation magnetic devices through micromagnetics simulation.

With the recent development of computers, it has become possible to numerically solve the problems of the magnetization structure in magnetic materials that could not be obtained so far by using micromagnetic simulation. Problems with the magnetic structure include miniaturization of HDD magnetic heads, improved stability, and increased surface storage density.

The Ohsawa Laboratory is paying attention to the race track memory, which is expected to be the next generation of magnetic memory. A racetrack memory is a magnetic device using a spin current, and is a magnetic memory in which magnetic walls that represent bits are arranged on a magnetic thin wire and those columns are slid by a spin current to read a magnetization state by a reading unit (Figure 1). Larger capacity can be expected compared to the current memory, and research and development are continuing toward practical use. Figure 2 shows a state of time evolution when a skyrmion is slid by a spin current using a magnetic structure called a skyrmion instead of a domain wall as an information carrier. It can be confirmed that the skyrmion is moving at the same speed by the spin current.

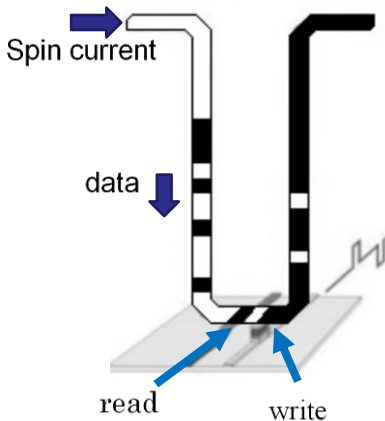


Fig. 1 Schematic figure of racetrack memory

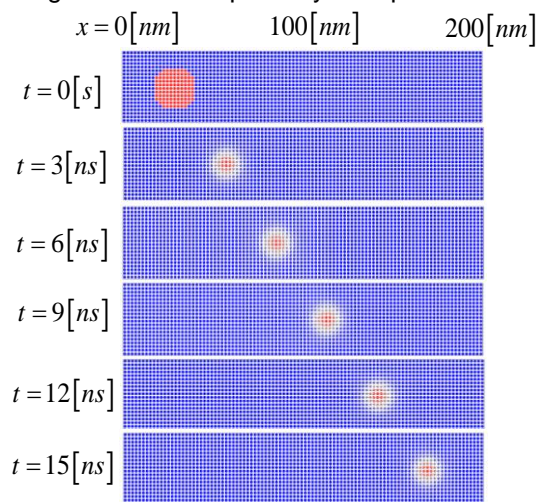


Fig.2 A state of skyrmion moving in a magnetic wire

Research of haptic transmission system



Name	YAMANOUCHI Wataru	E-mail	yamanouchi@numazu-ct.ac.jp
Job Title	Associate Professor	Degree	Ph.D.
Academic Society and Association	IEEE, IEEJ		
Research Keywords	Motion Control, Haptic communication, tactile sensation		
Technical Fields and Topics possible for collaboration	<ul style="list-style-type: none"> ▪ Position control ▪ Force control ▪ Estimate of real-world force sensation ▪ Remote control 		

Details of the Research Theme

Technological innovations and/or effective breakthroughs may find by applying haptic techniques to existing technologies.

This solution offers the basic haptic techniques for your needs.

Haptic sensation is third sensation in remote transmission. Audio-visual sensation was already implemented in many transmission systems. However, haptic transmission application doesn't be used in general.

The interactive characteristics of haptic sensation make it difficult haptic transmission as compared to audio-visual transmission (Fig. 1).

Haptics include the measurement, processing, store, transmission, represent, of the real-world force sensation (Fig. 2). For example, soft actuation of industrial robot, safety communication between human and robot, recording human techniques, remote communication feeling tactile sensation, and so on.

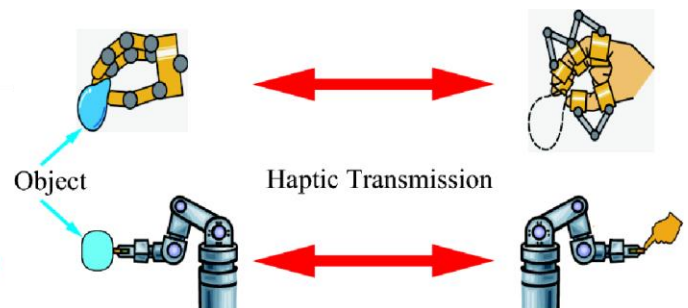


Fig.1 Multimedia communication

Fig. 2 Bilateral control for haptic communication